

Acroprint

DC 7000

Time Tracking Solution




**Data Collection
Terminal**

HARDWARE

- ABA Track-two magnetic stripe reader
- Barcode reader (visible or infrared)
- 20,000+ event capacity, for internal storage between pollings
- RS485, RS232, TCP/IP 10/100, 56 K international modem, 802.11 wireless communications
- Use swipe and go or keypad entry
- 2 line by 20-character blue blacklit display
- Lithium battery backup real-time quartz clock
- Durable ABS construction
- Flash memory for data protection
- Flash memory retains program in power outage
- Reversible mounting bracket for wall or desktop

HARDWARE OPTIONS

- Bioscrypt integrated fingerprint reader 4000 templates (factory installed)
- HID proximity reader (factory installed)
- Silway proximity reader (factory installed)
- Barcode wand/ or barcode scanner
- International power transformers
- 12 volt DC vehicle adaptor
- Access control/Signal relay kit
- Adaptors and cable
- 30 millimeter magnetic stripe and barcode badges
- 24 and 40 pocket badge racks
- Proximity badges

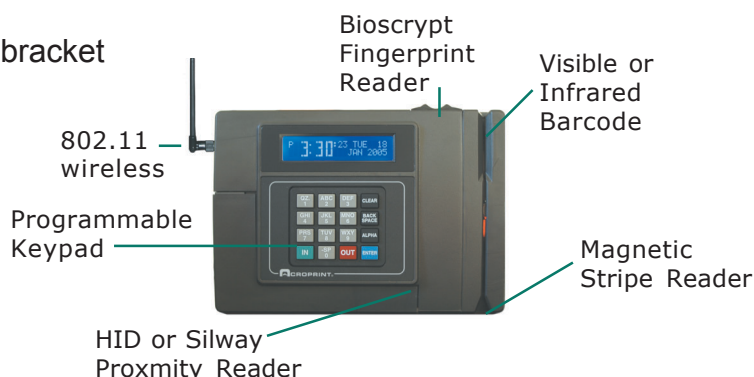

Acroprint Data Collection Terminal

PRODUCT SPECIFICATIONS

General Architecture:

Flash firmware, dedicated for ATR9800, ATR20/20, and/or custom software applications. The Acroprint data collection terminal utilizes a eZ80 microprocessor, real time calendar clock, integral keyboard, display, badge reader and communications interface.

Display: 2 line by 20 character blue backlit LCD (alphanumeric)

Keypad: 16 key, full travel, alphanumeric, programmable

Memory: 256K Flash internal
1 MEG Flash external
512 K Flash serial

Power: 120/240V, 50Hz/60Hz wall mount transformer
9 volt AC, 1000 mA minimum

Battery Capabilities: Internal Lithium Battery powers the real time clock for up to 10 years.

Media Input: Magnetic Stripe Card Reader (ABA II); Bar Code Reader, Code 39, (visible or infrared); External Bar Code Reader; Pen Wand; Fingerprint Reader; HID Proximity Reader

Communications: RS-232, RS-485 2-wire single terminal or multi-dropped protocols (LAN). Internal 56K international baud modem, 10/100 Ethernet/Internet TCP/IP (RJ45) and wireless 802.11 TCP/IP

Printer Connection:

Serial port RJ11 Modular, Parallel port 25 pin DB

Operating Temperature:

0 to 40 degrees Celsius; 32 to 110 degrees Fahrenheit

Humidity: 0 to 95% relative humidity, non-condensing

Enclosure: Flame retardant Polycarbonate/ABS, with reversible wall mounting bracket and secured access door that protects I/O ports.




Dimensions:

8.7 in. (23 cm) wide x 6.1 in. (16 cm) tall x 2.3 in (6 cm) deep

Shipping Weight: 4 lbs (1.85 kg)

System Requirements:

Windows 95/98/2000/Windows NT, XP, 2003

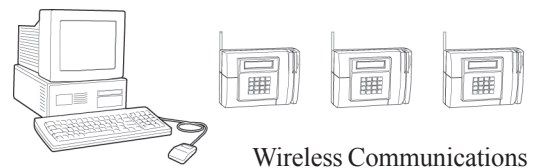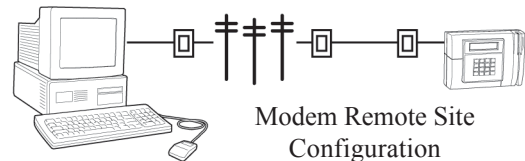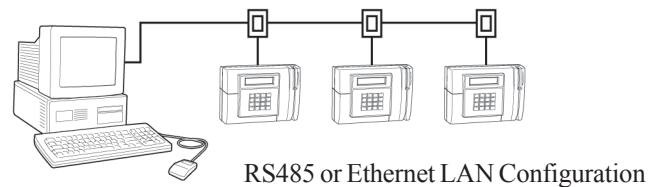

The color Green® is a trademark of Acroprint Time Recorder Company as applied to job time recorders, attendance systems, electronic time recorders, and attendance recorders. Windows 95/98/2000/ME and Windows NT, XP are registered trademarks of Microsoft Corporation. HID is a trademark of HID Corporation. All other trademarks are the property of their respective owners.

System Sales
1-800-334-7190

Fax
919-872-5967

System Technical Support
919-872-5800

Email
sales@acroprint.com

Website
<http://www.acroprint.com>